




passive fire protection and insulation

Suppliers of passive fire products,
acoustic and specialist insulation
Manufacturers of the Safire® Fire Stopping Range

Uniclass	EPIC
C/SIB	

Safire® Socket/Switch Box Putty Pads

120
mins

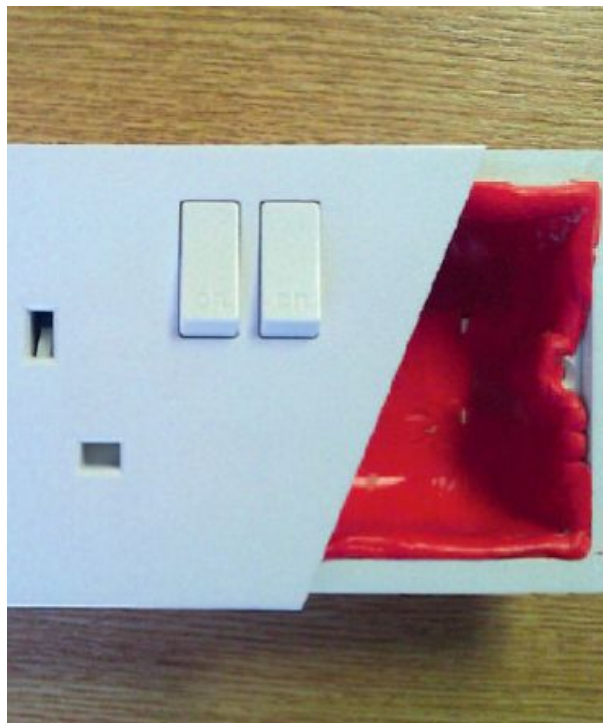

- 2 hour fire rating
- Excellent acoustic properties
- Can be easily installed on first or second fix

Safire® Socket Box Putty Pads are an easy to apply fire and sound rated sealant supplied as a non-setting putty. The pad is hand workable, reuseable and reserviceable due to its non-setting properties.

Socket Box Protection Pads will prevent the passage of smoke, flames, sound and air movement through the electrical socket. They are shaped for use on both single and double electrical sockets installations in dry lining walls.

The pads are supplied in a cross shape for internal installation in a socket or switch box.

For fire resistance only, the **Socket/Switch Box Protection Pad** achieves full fire performance without additional insulation between the studs.



SAFIRE a brand of Fireus Ltd.


Installation Instructions



1. Remove the paper from one side of the pad. (Cut off corners for single box installation).




2. Make a slit for the cable and pass the cable through the pad.



3. Push the pad fully inside the socket box.



4. Pay special attention to ensure the pad fits into the corners of the box.



5. Trim off any excess material and proceed as normal installation

Technical Details

Shape & Size

Internal Cross Shape

Double Box: 230mm x 170mm approx.

Single Box: 170mm x 170mm approx.

Sound Insulating

67 (-2;-7) Rw (C;Ctr) (dB)

Tested in accordance with

BS EN ISO 140-3:1995

Calculated in accordance with

BS EN ISO 717-1:1997

Fire Performance

Tested in accordance with:

BS EN 1364-1:1999

BS EN 1366-3:2004

Up to 120 minutes fire resistance in 100mm and 130mm gypsum board drywalls*

(* A full approval of the product is contained in Certifire Certificate of Approval No. CF831)

Other products in the Fireus Products range:

FIRE BARRIERS: Total Comfort Rock Fibre Fire Blanket

FIRE STOPPING: Compound
Fire Collars
Barriers (Batts)
Sealants
Fire Pillows
Expansion Joints
Flamestop60
Flamestop FSI

THERMAL: Industrial thermal and acoustic insulation

For information on any of the above, or the name of your nearest distributor, please contact our sales department on tel. 01524 388898.

Alternatively, product information is available from our web site at www.fireus.co.uk

Your distributor:



Fireus Ltd.

Unit 6 Thetis Road, Lune Industrial Estate, Lancaster, LA1 5QP

Tel. 01524 388898 | Fax. 01524 383724 | Email. info@fireus.co.uk | Web. www.fireus.co.uk