




fire stopping and insulation

Suppliers of passive fire products,
acoustic and specialist insulation
Manufacturers of the Safire® Fire Stopping Range

Uniclass	EPIC
CI/SFB	

FLAME STOP 60

Single Membrane Integrity Only Fire Barrier

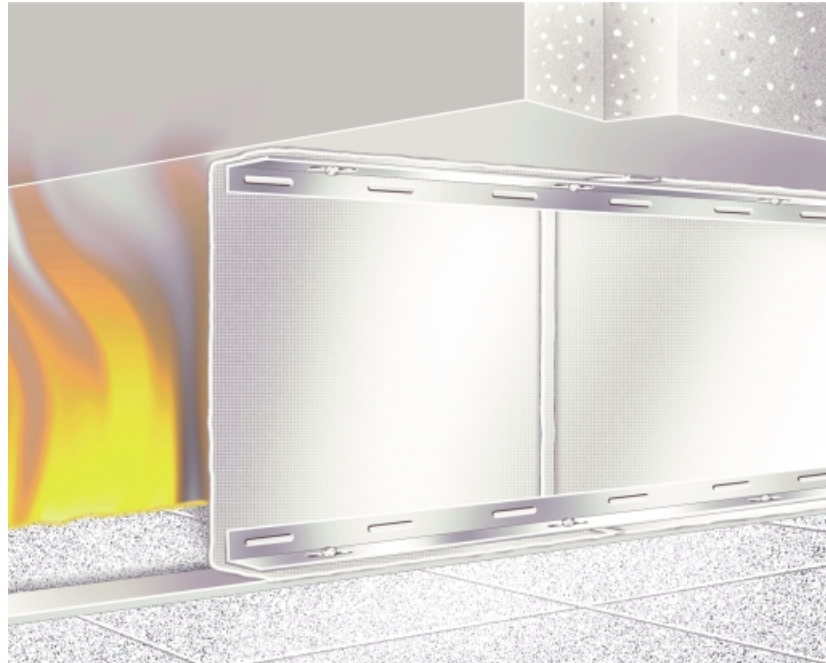

Cost effective, lightweight fire barrier for up to 1 hour compartmentation of voids and above fire rated walls where integrity only is required.

- Lightweight
- Versatile
- Easily Modified
- Waterproof
- Tested to BS476 Parts 20/22
- Easy to handle
- Simple to fix

FLAME STOP 60

Single Membrane Integrity Only Fire Barrier

FlameStop is available in a standard roll size of **1.55m x 25m**.

It is extremely lightweight and easy to use, it is also very strong.



Fixing details are as follows;

For 30 minutes integrity, FlameStop is fixed with galvanised angle fixed top, bottom and sides with m6 bolts or self tapping concrete screws at 600mm centres.

For 60 minutes integrity FlameStop is fixed with galvanised angle at the top, bottom and sides with m6 bolts at 300mm centres.

When joining Flame Stop, its edges are put together and stapled 25mm in at 300mm centres. The material is then folded over and stapled again 25mm in at 300mm centres. (see illustrations below)

measurements in mm

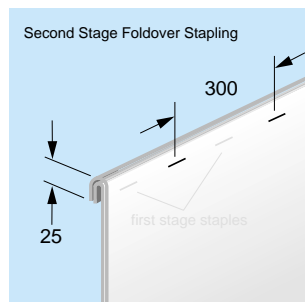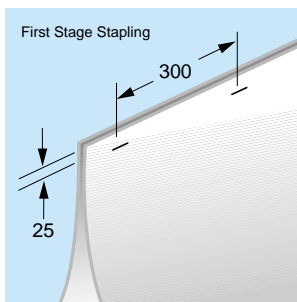

FlameStop60 during fire testing

Your distributor:



Fireus Ltd.

Unit 6 Thetis Road, Lune Industrial Estate, Lancaster, LA1 5QP

Tel. 01524 388898 | Fax. 01524 383724 | Email. info@fireus.co.uk | Web. www.fireus.co.uk