




SAFIRE COATED BATTS

- fixing for large openings
horizontal or vertical
for upto 2 hour rating

PAGE 1

DETAIL SHOWING BACK-TO-BACK GALV ANGLE T-PIECE

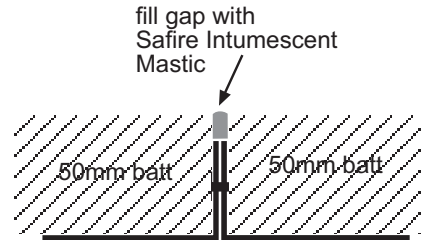


T-piece back-to-back
galv angle, 80mmx60mm
(using 2 x 40mmx60mm)

60mm side of
60mm x 40mm galv
angle of 1.2mm gauge

Opening perimeter fitted
out with galv angle, 40mmx 60mm
1.2mm gauge

DETAIL SHOWING FRONT SIDE OF LARGE OPENING

batt fixed to angle with
60mm self tapping screws
with washer, fixed at
400mm centres max.

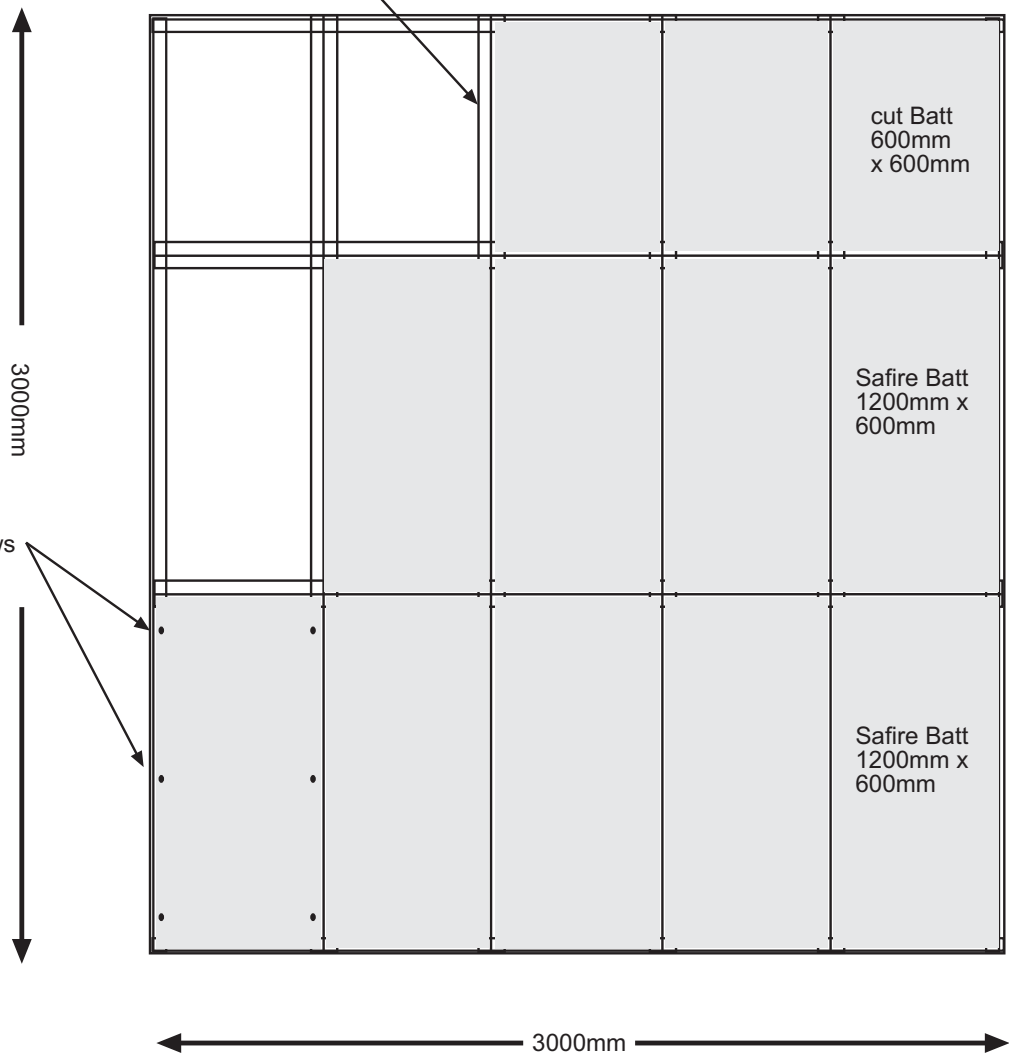




SAFIRE COATED BATTS

- fixing for large openings
horizontal or vertical
for upto 2 hour rating

PAGE 2

**DETAIL SHOWING
ADDITIONAL BATT BACKING
BEHIND EXPOSED GALV
ANGLE TO PROVIDE 2 HOUR
PERFORMANCE**

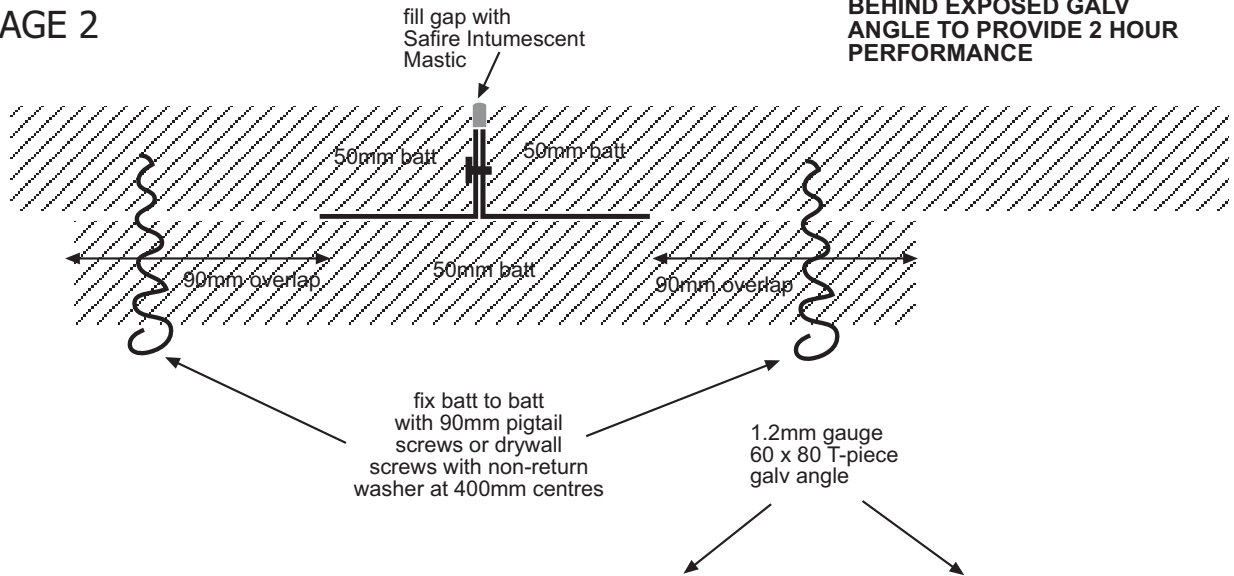

**DETAIL SHOWING
REVERSE SIDE OF OPENING
WITH ADDITIONAL COATED
BATT STRIPS COVERING
EXPOSED GALV ANGLE**



1.2mm gauge 60 x 40 perimeter galv angle

pigtail screws at 400mm centres max.

cut Safire Batt backing strip

